




NO.	Rev.	Revision Record	Date
△	A0	First issue	2019-11-06

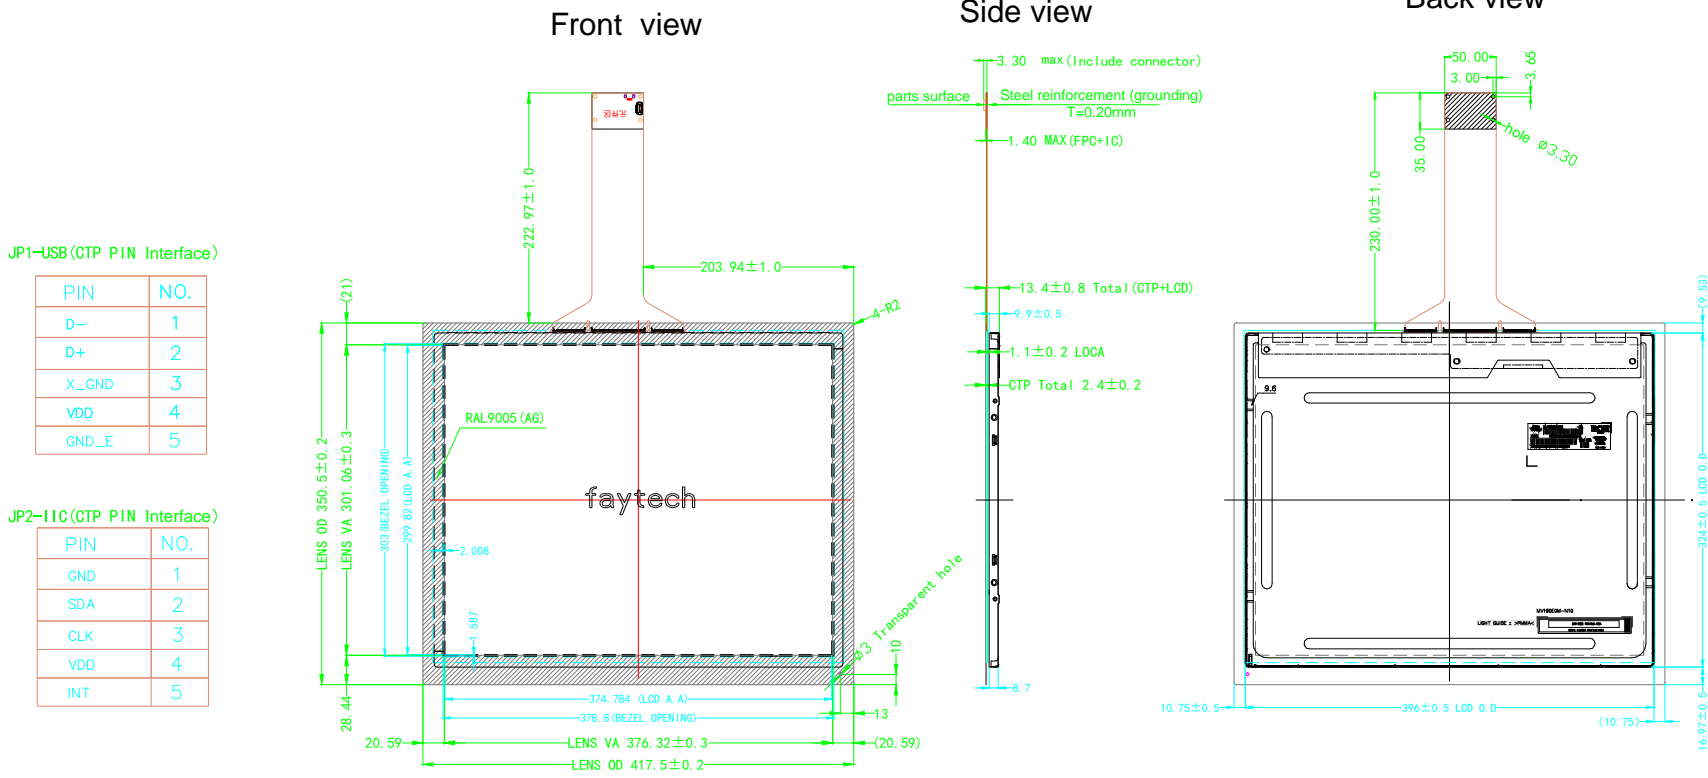

JP1-USB (CTP PIN Interface)

PIN	NO.
D-	1
D+	2
X_GND	3
VDD	4
GND_E	5

JP2-IIC (CTP PIN Interface)

PIN	NO.
GND	1
SDA	2
CLK	3
VDD	4
INT	5

Technical data:

- 1、Glass Material: thermal strengthening; AG parameter (Gloss grade 100% ± 10% GU ± 1°, Transparency 90% ± 1%, Haze 3%~5%);
- 2、Surface Hardness: 7H;
- 3、ITO Pitch: 54*96;
- 4、IC: EETI 80H100; Interface: USB(5PIN-1.0mm);
- 5、Support Operation: 10 Finger;
- 6、Not remarked area tolerance: ± 0.3mm;
- 7、ROHS Compliance;
- 8、Working Temperature: 0~+50°C, <90% RH;
- 9、Storage Temperature: -20~+60°C, <90% RH; (It depends on LCD working and storage temperature)
- 10、LCM: MV190E0M-N10.

CTP+LCD		深圳市飞帆泰科技有限公司 SHENZHEN FEIFANTAI TECHNOLOGY CO., LTD			
Sheet	1 of 1	NAV NO.	3030503443		
UNIT	mm	Model NO.	P190MV190E0M-N10-0B01		
REV.	A0	Part NO.	19.0 inch		
Scale	FIT	Designed	Bella	Date	2019-11-06
		Checked	Kelvin	Date	2019-11-06
		Approved		Date	