
32" Open Frame Capacitive Touch Monitor

FT32TMCAPOFHBOB



CLEAR BOND

Optically Bonded



- Anti-glare surface treatment (chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- A+ quality LED backlight panels with 100k hours lifetime
- 1000+ cd/m² brightness
- Integrated audio speakers (2x2w)
- 2 year guarantee

faytech's Open Frame Capacitive Touch Monitors are the perfect choice for industrial and business applications. The capacitive 10-finger multitouch panel brings an easy using experience for a wide range of applications. Each model in this series is built for reliable and extended service by using an A+ quality HD LCD panel with energy efficient LED technology. It is equipped with a wide range of standard connectors, such as HDMI, DVI, VGA, USB-Touch, serial and DC-In.

This device has an optically bonded touch panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general. This open frame version is a light weight model without any back case, which makes it perfect for integrating into your own system or mount at different locations.

It is the perfect interactive solution for digital signage, classrooms, meeting rooms, industrial automation, shopping malls, hotels and many other areas.



Yes 🗹 No 🗖

Supports Clamps













Product Name	32" Open Frame Capacitive Touch Monitor
Model No. / EAN No.	FT32TMCAPOFHBOB

IP Rating IP65 Front / IP40 Back

LCD Panel		
Screen diagonal (Inch/cm)	31.5/80.01	
Display active screen size (cm)	69.84×39.29	
Aspect ratio	16:9	
Physical resolution	1920×1080	
Maximum showable resolution	1920×1080	
Colours displayed	16.7M	
Brightness (cd/m ²)	1000	
Contrast	1200:1	
Typical reaction time Tr/Tf (ms)	8/8	
Visual Angle horizontal/vertical (°)	178/178	
Backlight / Backlight Lifetime (hours)	LED / 100,000	


External Connectors	
Video	1x HDMI 1.3 (incl. HDCP)
	1x DVI-D
	1x VGA
Audio	1x PC-Audio
Touch Connector	1x USB
Connectors	1x Serial
	1x 24V DC-In


Touch Panel		
Touch Technology	Projected Capacitive 10-point Multitouch	
Touch Panel Drivers	Windows; Linux; Mac; Android	
Touch Life (Contacts)	Unlimited	
Surface Hardness	7H	
Surface Treatment	Anti glare (chemical etching)	

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	12.00
Gross weight (kg)	25.00 (incl. cartonage)
Housing material (open frame)	Aluminum
Housing (mm) $L \times W \times H$	757.0 × 464.0 × 59.4
Cut-out required (mm) L × H	743.0 × 450.0
Amount of clamps required	10
(optional) Tape length required (mm)	2406.0 (2× 753.0 + 2× 450.0)
(optional) Amount of glue required (ml)	12.03
Mounting	VESA 400×300

Power	
Power Supply	100-240V ACDC active switching; 24V DC-Out
Working Power (V)	24
Power Consumption (W)	92
Stand-By Consumption (W)	<1

Included in the Delivery	
Power Supply (see Power section)	
Short Installation Manual	
HDMI Cable	
USB Cable	

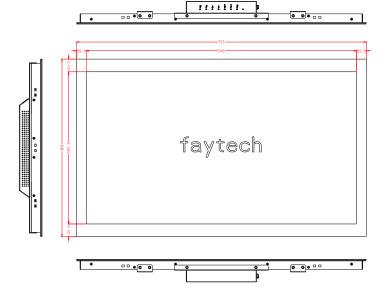

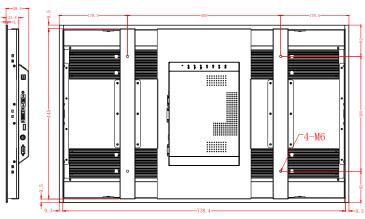

General Tolerance ISO 2768c

Corporate Headquarters

faytech AG Bischhäuser Aue 10 37213 Witzenhausen Germany

support@faytech.com contact@faytech.com www.faytech.com

China: +86 755 8958 0612 Germany: +49 5542 30374 10 USA: +1 646 205 3214 India: +91 11 49707436 Japan: +070 4127 5167