


32" Capacitive Touch Monitor

FT32TMCAPOB



- Anti-glare surface treatment (chemical etching)
- 10-Finger-Multi Touch Capacitive Touch Panel
- Optically bonded Touch Panel to LCD Panel
- Integrated audio speakers (2x2w)
- 2 year guarantee (24/7 operation)







faytech's large format Capacitive Touch Monitors have a modern sleek look with IP65 water- and dust proof front panels. This device has capacitive 10-finger multitouch, glass front reaching MosH 7, the glass surface is anti-glare treated (chemical etching) and a wide variety of connectors.

This device has an optically bonded touch panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general.

These devices are the perfect choice for a wide variety of applications, including digital signage, kiosk systems and in areas like shopping malls, classrooms, hotels and many more.

Legend / Notes	
Applicable to version 1	(v2)
Applicable to version 2	(v3)
Applicable to all Versions	None



Product name				32" Capacitive Touch Monitor			
Article code / EAN number				FT32TMCAPOB / 6920734032105			
Global Article Code	European Article Code	Release date (DDMMYY)	Version*	Global Article Code	European Article Code	Release date (DDMMYY)	Version*
20205005968	1010500386	01/11/2020	v1				

IP Rating	
IP65 Front / IP40 Back	

LCD Panel	
Screen diagonal (Inch/cm)	31.5/80.01
Display active screen size (cm)	69.84×39.29
Aspect ratio	16:9
Physical resolution	1920×1080
Maximum showable resolution	1920×1200
Colours displayed	16.7M
Brightness (cd/m ²)	350
Contrast	3000:1
Typical reaction time Tr/ Tf (ms)	6/1
Visual Angle horizontal/vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / min. 30,000



External Connectors	
Video	1x VGA
	1x DVI-D
	1x HDMI 1.3 (incl. HDCP)
Audio	1x PC-Audio
Touch Connector	1x USB
Connectors	1x 24V DC-IN

Touch Panel	
Touch Technology	Projected Capacitive 10-point Multitouch
Touch Panel Drivers	Windows; Linux; Mac; Android
Touch Life (Contacts)	Unlimited
Surface Hardness	7H
Surface Treatment	Anti-glare (chemical etching)
Glass Strengthening	Tempered

Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	16.00
Gross weight (kg)	20.00 (incl. cartonage)
Housing material	Aluminum
Housing (mm) L x W x H	768.0 x 475.0 x 63.7
Cut-out for clamp supports (mm) L x H	N/A
Max. wall thickness for clamp supports (mm)	N/A
Amount of clamps required	N/A
Mounting	VESA 400×300

Power	
Power Indicator	Green LED
Power Supply	100-240V ACDC active switching; 24V DC-Out
Working Power (V)	24
Power Consumption (W)	47
Stand-By Consumption (W)	<1

Included in the Delivery	
Power Supply (see Power section)	
HDMI Cable	
USB Cable	

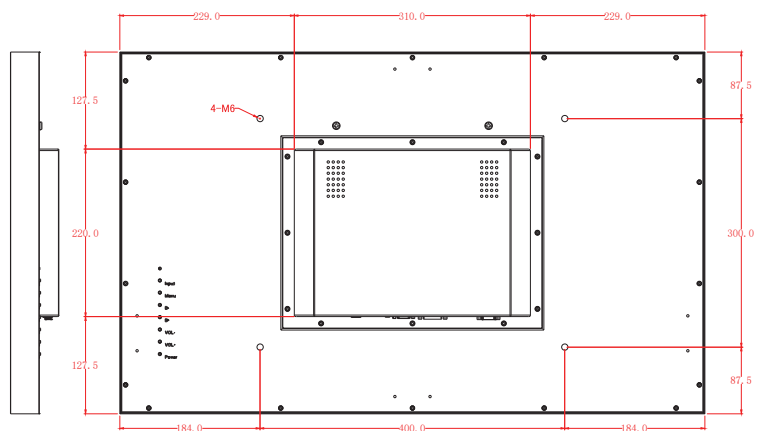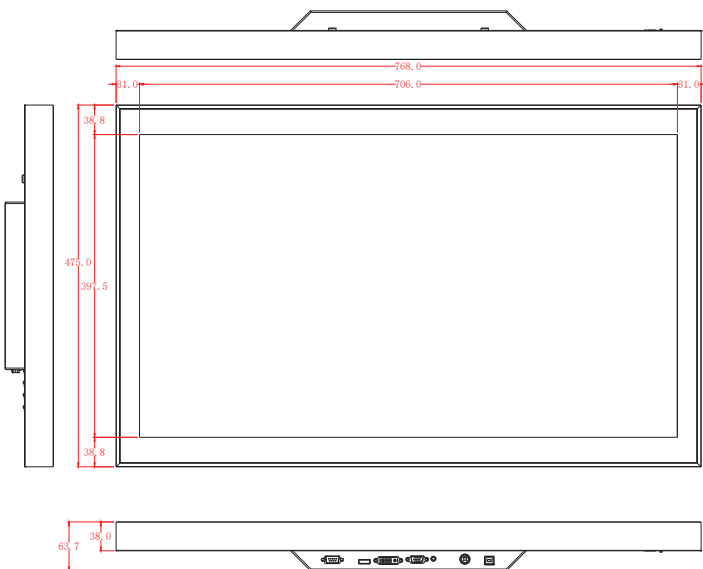

Update Notes:

* Only the latest version can be ordered, previous versions are only for historic reference.

Version:

v1

-

Changes:

First version

Corporate Headquarters

faytech AG

Bischhäuser Aue 10
37213 Witzenhausen
Germany

support@faytech.com
contact@faytech.com
www.faytech.com

Germany: +49 5542 30374 0

China: +86 755 89580612

USA: +1 646 843 0877

India: +91 11 49707436

Japan: +81 366 722 920

Korea: +82 10 3479 1815