

Pictures show sample configurations, real product may vary.


DISPLAY

Display Size [inch]	21.5
Aspect Ratio	16 : 9
Resolution	1920 × 1080
Active Area [mm]	477.00 × 268.00
Brightness [cd/m ²]	1000
Contrast Ratio	1000 : 1
LED MTBF [h]	100,000
Viewing Angle [°]	178 / 178
Display Interface	LVDS

PC/MONITOR SYSTEM

Processor	Intel Atom® x6413E (Elkhart Lake)
Standard Operating System	Debian 12 ¹
OS Available on Request (additional fee)	Linux Ubuntu, Windows 10 & 11
RAM Size	8 GB DDR4
SSD Size	128 GB ²
Loudspeaker	2× 2W
Wifi	Intel® AX210
HDMI	1
DP	1
Audio In / Out	1 (Realtek® ALC897 Audio CODEC)
USB 2.0	2
USB 3.2	2
Ethernet Network (10/100/1000 Mbit/s)	2 Realtek® 8111H (LAN 1 PoE option, LAN 2) ³
Serial Port RS232 (RX / TX only)	2
SD Card Slot	1
SIM Card Slot ⁴	1

SERIAL (RS232) PIN DEFINITION

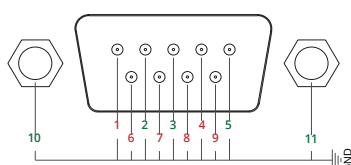

2	RXD1
3	TXD1
5	GND
10	GND
11	GND

TOUCH PANEL

Touch Type	Projected Capacitive 10-point Multi-touch
Printing Type	Organic
Glass Thickness [mm]	1.1
Cover Glass Surface Treatment	AG (chemical etching)
IK Protection	IK08
Printing Color	RAL9004 (Black)
Strengthening	Thermally Strengthened
Touch Controller	EXC81W84
Touch Interface	USB
Touch Resolution RX	74
Touch Resolution TX	42
Optical Bonding	Clear Bond®

ENVIRONMENTAL CONDITIONS

Operation Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C
Humidity Range	10% to 90%

CERTIFICATIONS

CE Certificate	Yes
FCC Certificate	Yes

CHASSIS

Case Design	Open Frame
Case Size	Large
IP Protection	IP65 Front / IP40 Back
Case Color	RAL9004 (Black)
Case Coating	Powder Coating
Case Material	Aluminum
Case size L × W × H [mm]	535.1 × 343.1 × 57.6
Cut-out for clamp supports L × H [mm]	519.1 × 327.1
Max. wall thickness for clamp supports [mm]	5.0
Amount of clamps required	8
Mounting	VESA 100 × 100

¹ faytech Tech Co., Ltd. is not affiliated with Debian. Debian is a registered trademark owned by Software in the Public Interest, Inc.

² The latest touch PCs have 128GB SSD (from SN250911B0239), first used for production on February 4th 2026. Any earlier serial numbers use 120GB SSD

³ To enable Power over Ethernet (PoE), the PoE Module accessory is required.

⁴ Requires additional LTE module and antenna before being able to use this slot

ACCESSORIES

Power Adapter	100-240V ACDC active switching; 12V DC-Out
Wifi Antenna	RP-SMA female
Short Instruction Manual	Yes
Power over Ethernet (PoE)	No, available upon request

POWER

Power Indicator	Green LED
Working Power	9-36V
Power Consumption	70.3W
Stand-By Consumption	<1W

INTENDED USE/APPLICATION

The device is to be used as (touchscreen) display for **indoor** use as control panel, digital signage, way-finding, POS and similar applications with **high brightness** backlight.


Direct sunlight might increase the device temperature beyond the allowed storage and operation conditions. Therefore the devices must be protected against direct sunlight. Devices operated or stored outside the specified temperature ranges are not covered by warranty.

WEIGHT & PACKAGING

Net Weight	~5.00 kg est.
Gross Weight	~7.30 kg est. (incl. Cartonage)
Packaging Material	100% recyclable cardboard and polyethylene (PE)
Packaging Size L × W × H [mm]	685.0 × 410.0 × 80.0

Front kit & Back kit concept:

Pre-assembled or separately packaged available
Easily replace or switch back kits and front-kits
Connected through various connectors
Assembly to be done by a professional

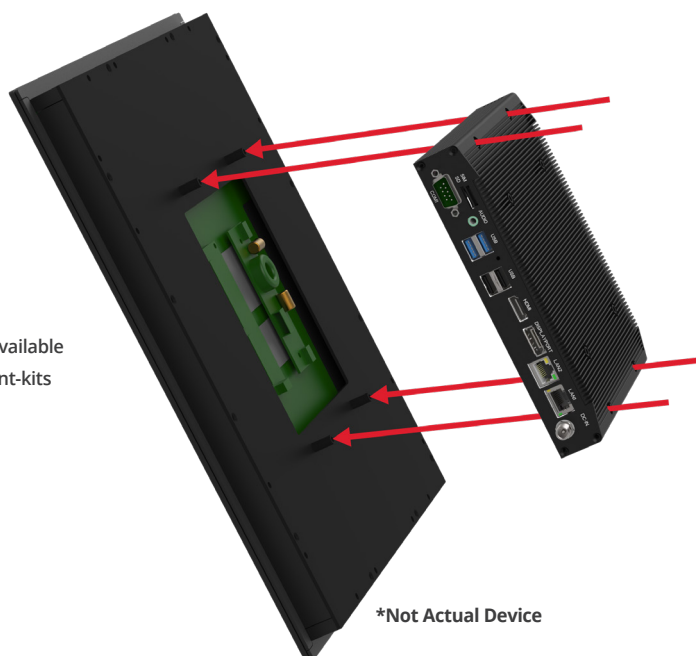


*Not Actual Device

DIMENSIONS


Pictures show sample configurations, real product may vary.

21.5" OPEN FRAME FRAME FRONT KIT

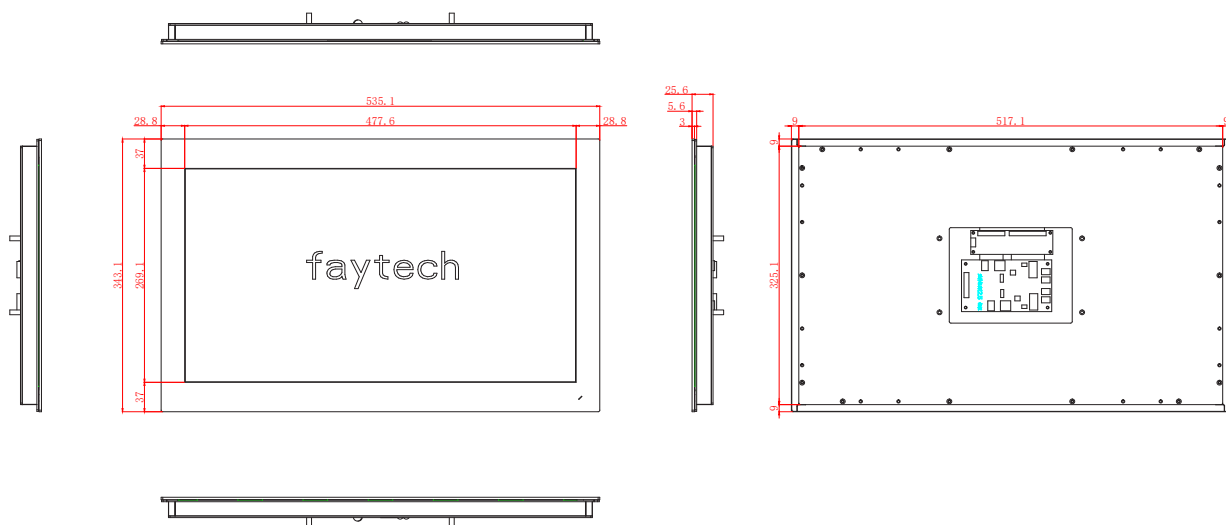

Tolerance: $\pm 1\text{mm}$

LARGE PC BACK KIT (X6413E)

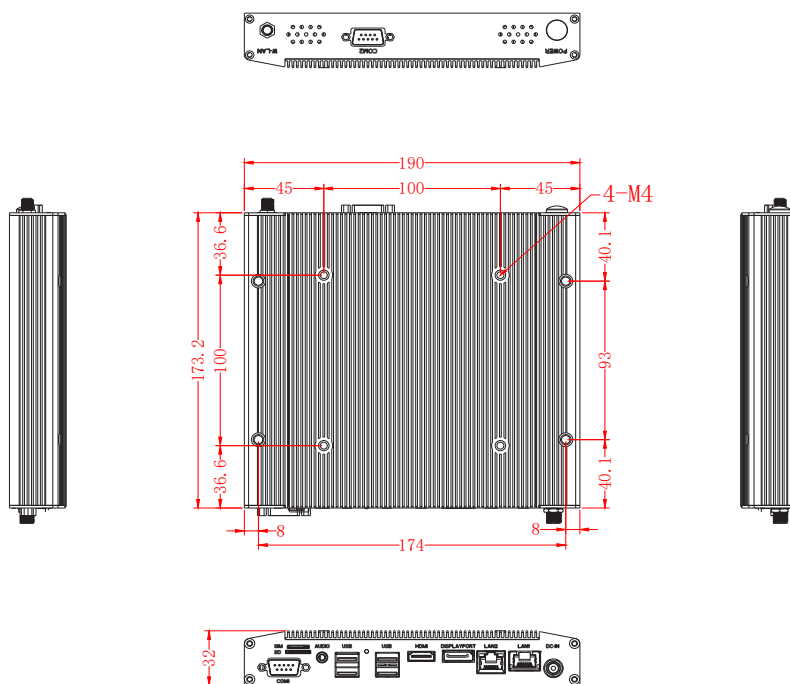

UPDATE NOTES:

Version:	Changes:
v1	First Version