


Not actual representation of COF

Prototype Datasheet (Preliminary)

02.09.2026

Pictures show sample configurations, real product may vary.



DISPLAY

Display Size [inch]	12.4
Display Technology	AUO Transparent Micro-LED
Pixel Density [mm]	0.275 (93 ppi)
Aspect Ratio	~3:1 (3.03:1)
Resolution	1092 × 360
Active Area W × H [mm]	299.75 × 98.82
Display Border L/R/U/D [mm]	0.17 / 0.17 / 0.17 / 10
Panel Size [mm]	300.1 × 109 × 1.2 (w/o cover glass)
Transmittance	50%
Brightness [cd/m²]	2000
Color Gamut	NTSC: 110%
Interface	DP

COVER GLASS

Cover Glass Thickness F/B [mm]	0.7 / 0.7
Cover Glass Surface Treatment	TBD
IK Protection	TBD
Strengthening	Thermally Strengthened
Optical Bonding	Clear Bond®

INTENDED USE/APPLICATION

The device is to be used as a Transparent Micro-LED for indoor or semi-outdoor use to replace glass applications for retail, hospitality, transportation, automotive, aerospace and military.

Direct sunlight might increase the device temperature beyond the allowed storage and operation conditions. Therefore the devices must be protected against direct sunlight. Devices operated or stored outside the specified temperature ranges are not covered by warranty.

ENVIRONMENTAL CONDITIONS

Operation Temperature	-30°C to 85°C
Storage Temperature	-40°C to 90°C
Operation Humidity Range	10% to 80%
Storage Humidity Range	10% to 90%

CERTIFICATIONS

CE Compliant	Yes (no certificate)
FCC Compliant	Yes (no certificate)

Products are Compliant with these regulations, but no formal certificate is available, this can be requested for an additional fee.


POWER

Working Power	TBD
Power Consumption	TBD
Stand-By Consumption	<1W

WEIGHT & PACKAGING

Net Weight	~TBD kg est.
Gross Weight	~TBD kg est. (incl. Cartonage)
Packaging Material	100% recyclable cardboard and polyethylene (PE)
Packaging Size L × W × H [mm]	TBD

DIMENSIONS

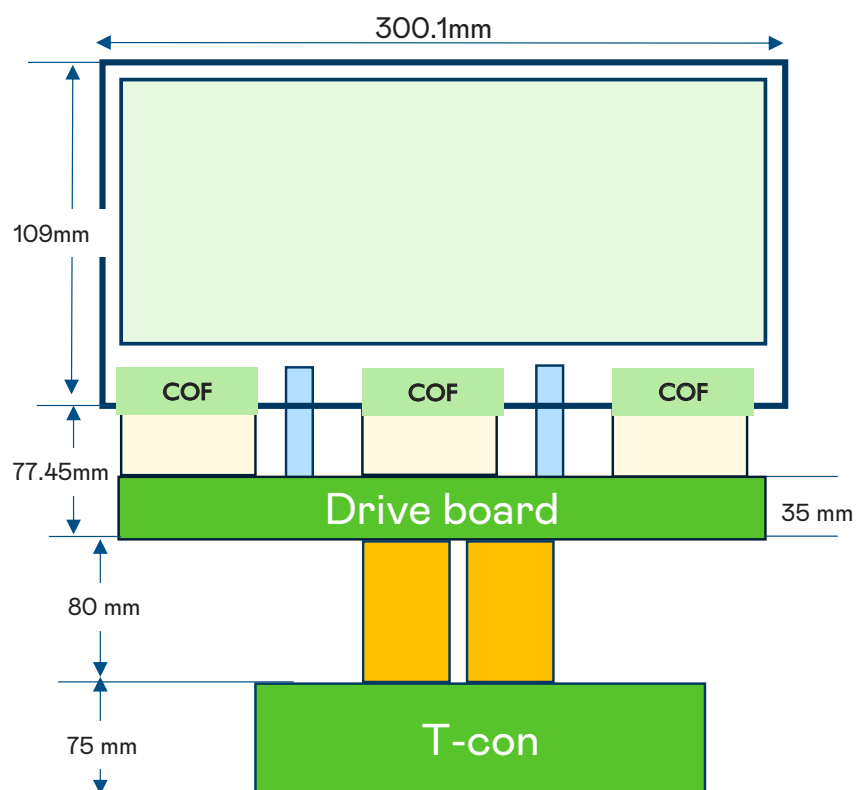

UPDATE NOTES:

Version:	Changes:
v1	First version